


Stem tightness with
3 NBR O-ring gaskets




Stem dust cover

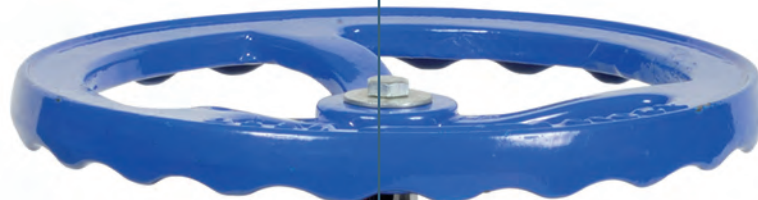


Polymere hat screws for
anti-corrosion protection


Whole holes NBR hat gasket
for perfect tightness

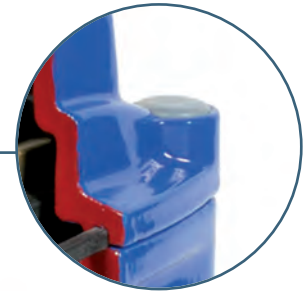


GGG50 ductile iron body

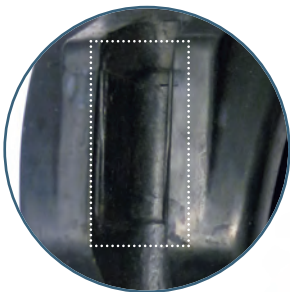

Patented skate
for easy wedge
sliding

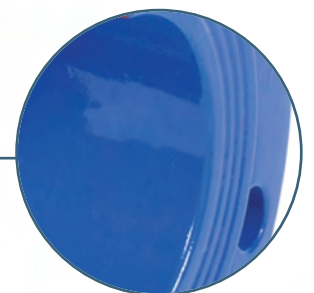

Epoxy coating
(AkzoNobel®
for some types)

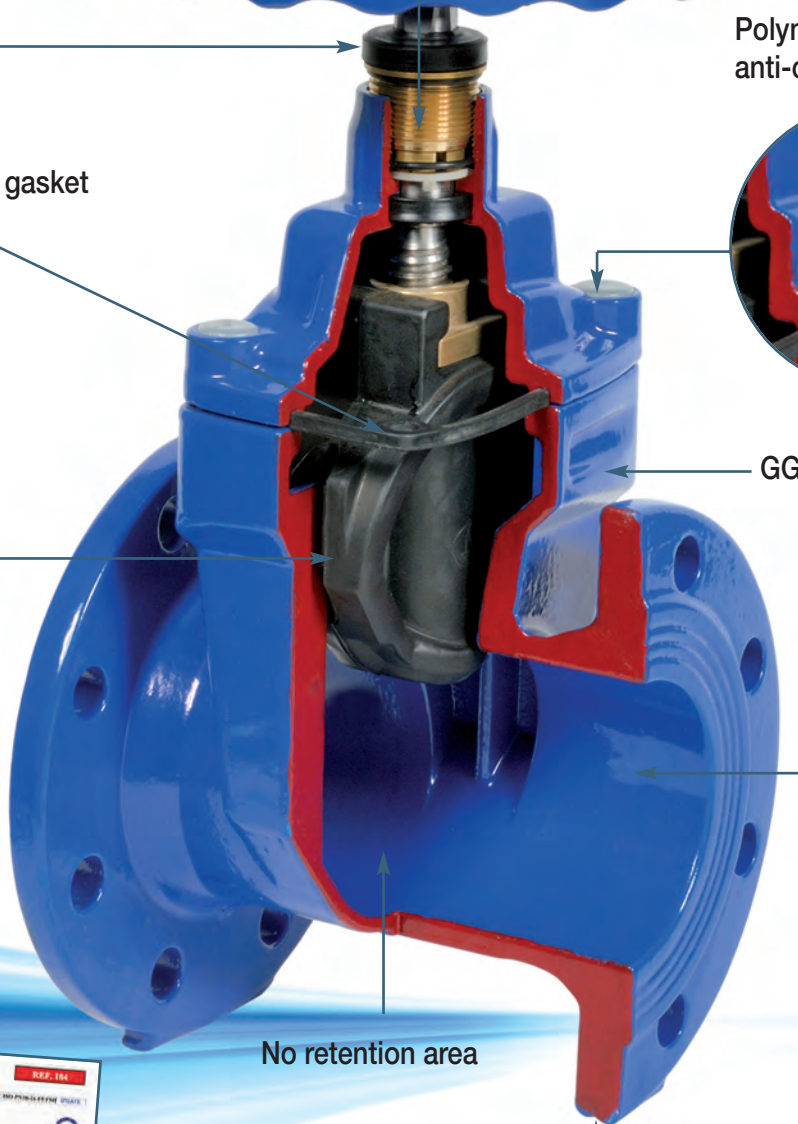

No retention area

Positioning base



180 - 181 - 182 - 184 - 185

